


FUJIDRIVE[®]
FREEDOM TO MOVE

WWW.FUJIDRIVE.COM

NINGBO FUJI DRIVE CO., LTD.
YINZHOU SOUTHERN INDUSTRY ZONE, NINGBO CITY, CHINA
CALL: +86 - 057455681351 WEB: WWW.FUJIDRIVE.COM

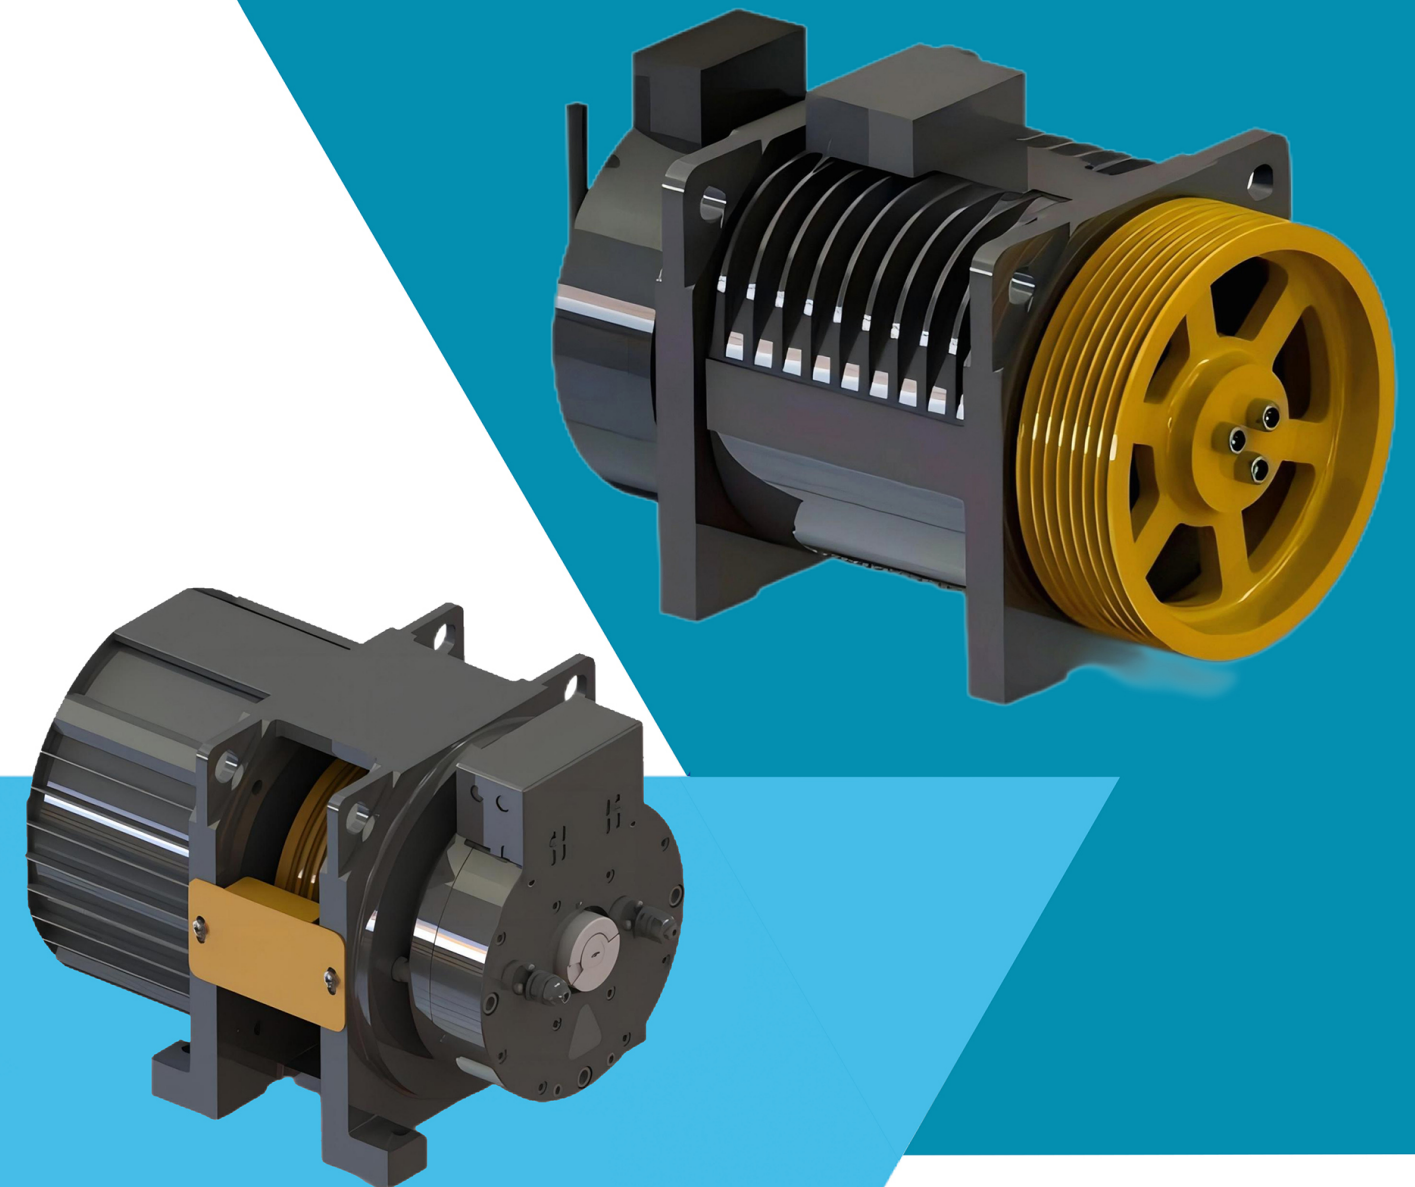


NINGBO FUJI DRIVE CO., LTD.
YINZHOU SOUTHERN INDUSTRY ZONE, NINGBO CITY, CHINA

FD160A (2:1)



FD160A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT
INTRODUCTION

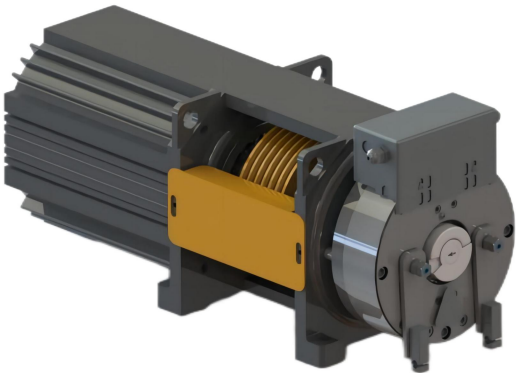

- ★ Load: 320kg—450kg
- ★ Speed: 0.4m/s—1.0m/s
- ★ Suspension: 2:1
- ★ Max. Static Load: 2500kg
- ★ Pole pairs: 8
- ★ IP Code: IP41
- ★ INS. Class: F
- ★ Brake: DC110V/1.53A

PRODUCT
SIZE

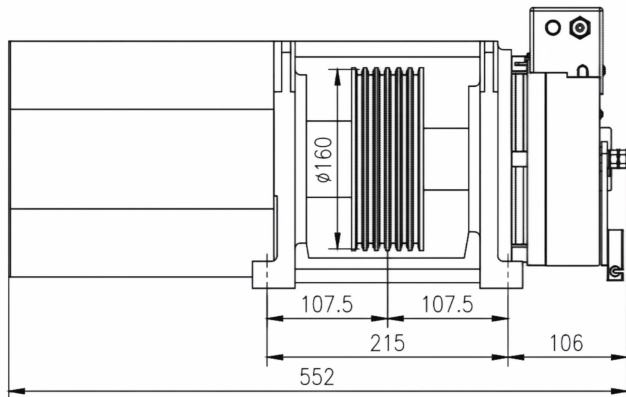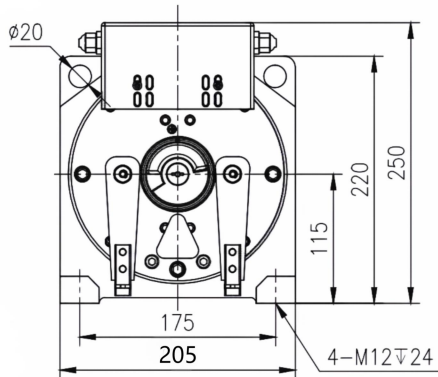

FD160A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE


系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳直径 Rope Dia	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 Power	额定电流 Curren 380V	额定电流 Curren 220V	额定频率 Frequency	额定转速 Rated soeec
		kg	m/s	mm	mm	pcs	mm	Nm	kw	A	A	Hz	pm
FD160A	FD160A-0320.040	320	0.4	160	6	4	10	85	1.2	5.5	5.5	12.8	96
	FD160A-0320.050		0.5						1.5	6	6	16.0	120
	FD160A-0320.060		0.6						1.8	6	6	19.2	144
	FD160A-0320.100		1.0						3	6	10	31.9	239
	FD160A-0400.040	400	0.4	160	6	5	10	107	1.2	6.5	6.5	12.8	96
	FD160A-0400.050		0.5						1.5	7	7	16.0	120
	FD160A-0400.060		0.6						1.8	7.5	7.5	19.2	144
	FD160A-0400.100		1.0						3	7.5	12.5	31.9	239
	FD160A-0450.040	450	0.4	160	6	5	10	120	1.2	7.5	7.5	12.8	96
	FD160A-0450.050		0.5						1.5	8	8	16.0	120
	FD160A-0450.060		0.6						1.8	8	8	19.2	144
	FD160A-0450.100		1.0						3	8	14	31.9	239

FD160B (2 : 1)

GLD160B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT


INTRODUCTION

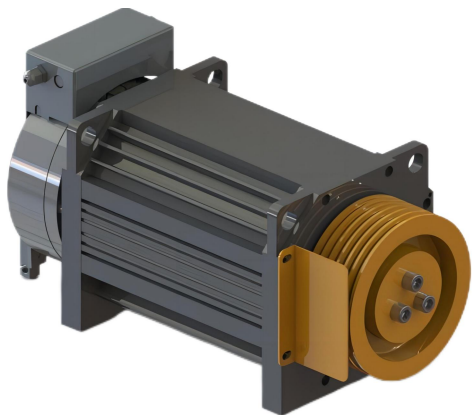

- ★ Load:320kg—450kg
- ★ Speed:0. 4m/s—1. 0m/s
- ★ Suspension:2:1
- ★ Max. Static Load:2500kg
- ★ Pole pairs:8
- ★ IP Code:IP41
- ★ NS. Class:F
- ★ Brake:DC110V/1. 53A

PRODUCT

SIZE

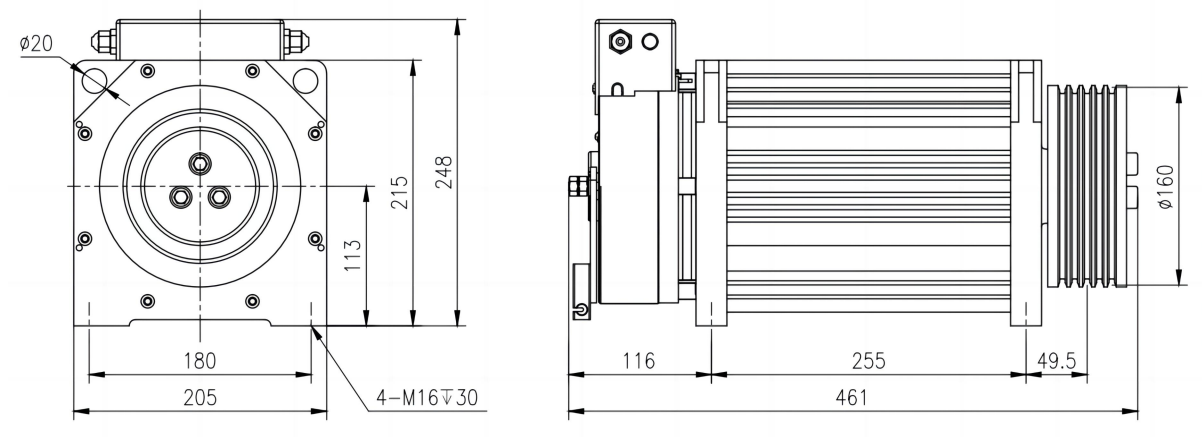


FB160B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳直径 Rope Dia	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 Power	额定电流 Curren 380V	额定电流 Curren 220V	额定频率 Frequency	额定转速 Rated soeec
		kg	m/s	mm	mm	pcs	mm	Nm	kw	A	A	Hz	pm
FD160B	FD160B-0320.040	320	0.4	160	6	4	10	85	1.2	5.5	5.5	12.8	96
	FD160B-0320.050		0.5						1.5	6	6	16.0	120
	FD160B-0320.060		0.6						1.8	6	6	19.2	144
	FD160B-0320.100		1.0						3	6	10	31.9	239
	FD160B-0400.040	400	0.4	160	6	5	10	107	1.2	6.5	6.5	12.8	96
	FD160B-0400.050		0.5						1.5	7	7	16.0	120
	FD160B-0400.060		0.6						1.8	7.5	7.5	19.2	144
	FD60B-0400.100		1.0						3	7.5	12.5	31.9	239
	FD160B-0450.040	450	0.4	160	6	5	10	120	1.2	7.5	7.5	12.8	96
	FD160B-0450.050		0.5						1.5	8	8	16.0	120
	FD160B-0450.060		0.6						1.8	8	8	19.2	144
	FD160B-0450.100		1.0						3	8	14	31.9	239

FD160C (2:1)


FD1 60C (SUSPENSION2: 1) SERIES GEARLESS TRACTION MACHINE

PRODUCT
INTRODUCTION

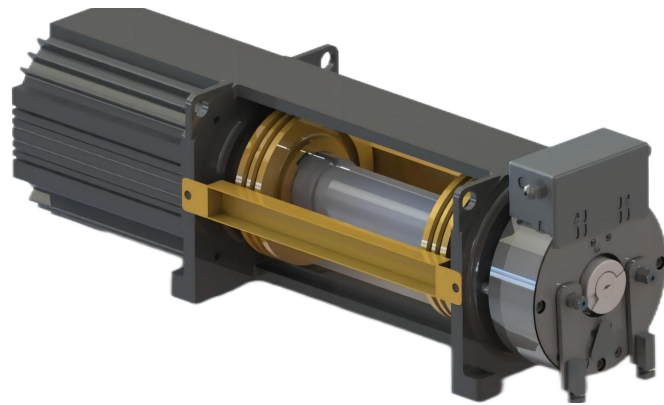

- ★ Load:320kg--450kg
- ★ Speed:0.4m/s--1.0m/s
- ★ Suspension:2:1
- ★ Max. Static Load:2500kg
- ★ Pole Pairs:8
- ★ IP Code:IP41
- ★ INS. Class:F
- ★ Brake DC110V/1.53A

PRODUCT
SIZE

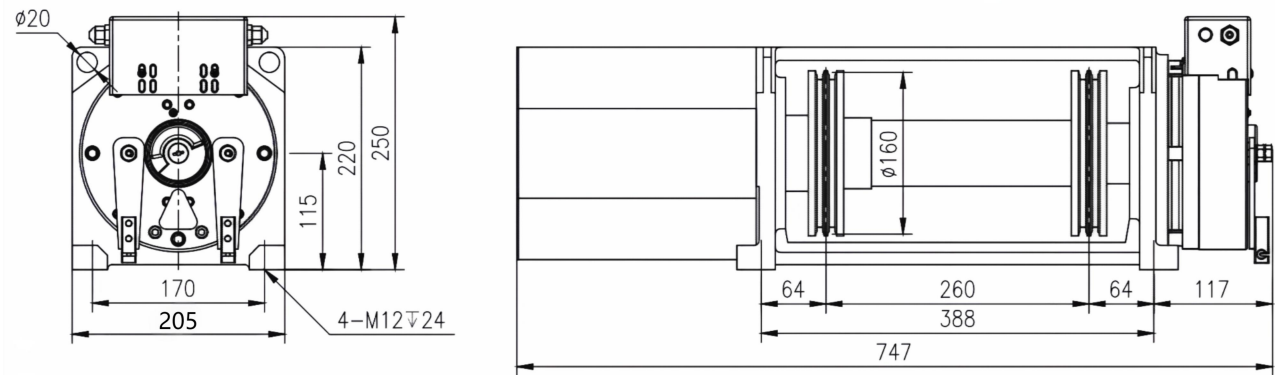


FD160C (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳直径 Rope Dia.	槽数 Groove	槽间距 Distance Between Grooves	转矩 Torque	功率 power	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequency	额定转速 Rated Speed
		kg	m/s	mm	mm	pcs	mm	Nm	kw	A	A	Hz	rpm
FD160C	FD160C-0320.040	320	0.4	160	6	4	12	85	1.2	5.5	5.5	12.8	96
	FD160C-0320.050		0.5						1.5	6	6	16.0	120
	FD160C-0320.060		0.6						1.8	6	6	19.2	144
	FD160C-0320.100		1.0						3	6	10	31.9	239
	FD160C-0400.040	400	0.4	160	6	4	12	107	1.2	6.5	6.5	12.8	96
	FD160C-0400.050		0.5						1.5	7	7	16.0	120
	FD160C-0400.060		0.6						1.8	7.5	7.5	19.2	144
	FD160C-0400.100		1.0						3	7.5	12.5	31.9	239
	FD160C-0450.040	450	0.4	160	6	4	12	120	1.2	7.5	7.5	12.8	96
	FD160C-0450.050		0.5						1.5	8	8	16.0	120
	FD160C-0450.060		0.6						1.8	8	8	19.2	144
	FD160C-0450.100		1.0						3	8	14	31.9	239

FD200A (2 : 1)



GLH200 (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT INTRODUCTION

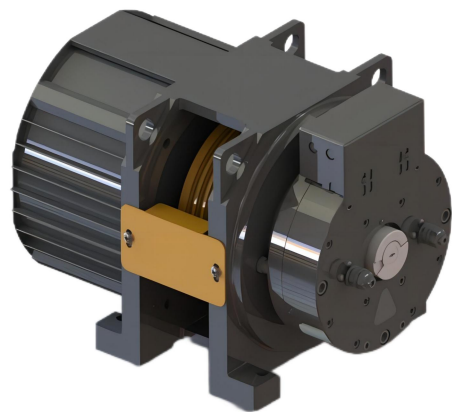

- ★ Load: 320kg—630kg
- ★ Speed: 0.4m/s—1.0m/s
- ★ Suspension: 2:1
- ★ Max. Static Load: 2500kg
- ★ Pole pairs: 8
- ★ IP Code: IP41
- ★ INS. Class: F
- ★ Brake: DC110V/1.23A

PRODUCT SIZE

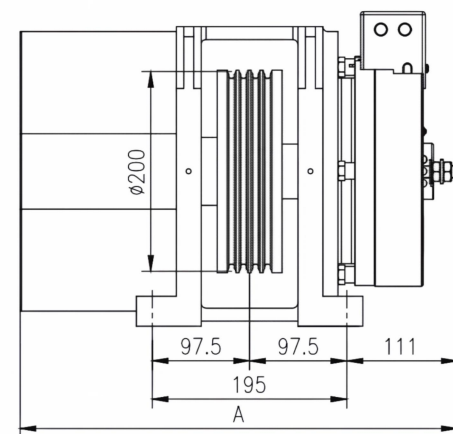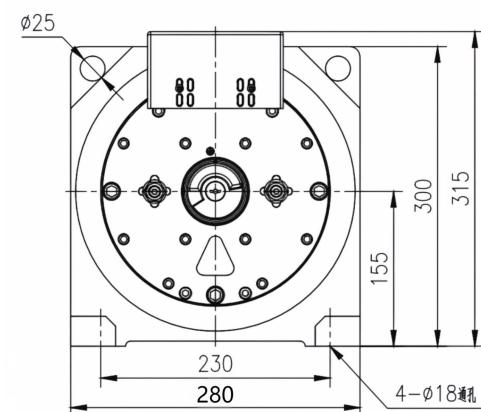


FD200A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Serie	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳直径 Rope Dia	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 power	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequenc	额定转速 Rated Speed	尺寸(mm)
		kg	m/s	mm	mm	pcs	mm	Nm	kW	A	A	Hz	rpm	A
FD200A	FD200A-0320.040	320	0.4	200	8	3	12	107	1.2	5.5	5.5	10.1	76	438
	FD200A-0320.050		0.5						1.5	6	6	12.8	96	
	FD200A-0320.060		0.6						1.8	6.5	6.5	15.3	115	
	FD200A-0320.100		1.0						3	10	10	25.5	191	
	FD200A-0400.040	400	0.4	200	8	3	12	134	1.2	6.5	6.5	10.1	76	438
	FD200A-0400.050		0.5						1.5	7	7	12.8	96	
	FD200A-0400.060		0.6						1.8	7.5	7.5	15.3	115	
	FD200A-0400.100		1.0						3	7.5	12.5	25.5	191	
	FD200A-0450.040	450	0.4	200	8	4	12	150	1.2	7.5	7.5	10.1	76	438
	FD200A-0450.050		0.5						1.5	8	8	12.8	96	
	FD200A-0450.060		0.6						1.8	8	8	15.3	115	
	FD200A-0450.100		1.0						3	8.5	14	25.5	191	
	FD200A-0630.040	630	0.4	200	8	5	12	210	1.7	10	10	10.1	76	463
	FD200A-0630.050		0.5						2.1	10	10	12.8	96	
	FD200A-0630.060		0.6						2.5	11	11	15.3	115	
	FD200A-0630.100		1.0						4.2	11	18	25.5	191	

FD240A (2 : 1)


FD240A (SUSPENSION 2 : 1) SERIES GEARLESS TRACTION MACHINE

PRODUCT
INRODUCTION

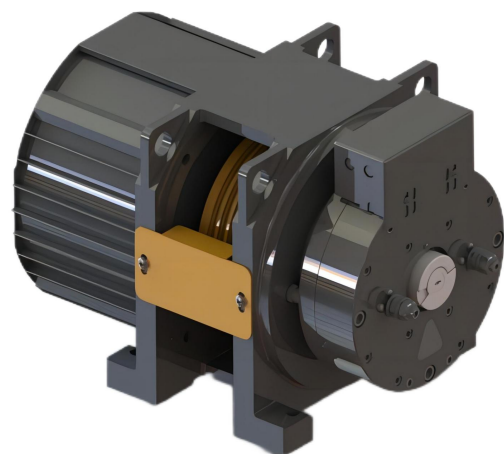

- ★ Load:320kg—630kg
- ★ Speed:0. 4m/s--1. 0m/s
- ★ Suspension:2:1
- ★ Max. Static Load:2500kg
- ★ Pole pairs:8
- ★ IP Code:IP41
- ★ INS. Class:F
- ★ Brake:DC110V/1. 23A

PRODUCT
SIZE

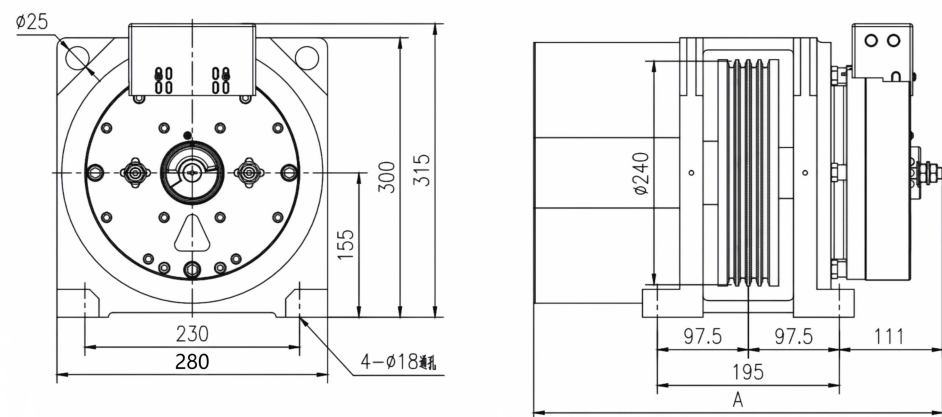


FD240A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 peed	曳引轮直径 sheave Dia	钢丝绳直径 Rope Dia.	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 power	额定电流 Current 380V	额定电流 Current 220V	额定频率 fequenc	额定转速 Ratec Speed	尺寸 mm
		kg	m/s	mm	mm	pcs	mm	Nm	kW	A	A	Hz	pm	A
FD240A	FD240A-0320.040	320	0.4	240	8	3	12	130	1.2	6	6	8.5	64	463
	FD240A-0320.050		0.5						1.5	6	6	10.7	80	
	FD240A-0320.060		0.6						1.8	6	7	12.8	96	
	FD240A-0320.100		1.0						3	6	10	21.2	159	
	FD240A-0400.040	400	0.4	240	8	3	12	160	1.2	7.5	7.5	8.5	64	463
	FD240A-0400.050		0.5						1.5	7.5	7.5	10.7	80	
	FD240A-0400.060		0.6						1.8	7.5	7.5	12.8	96	
	FD240A-0400.100		1.0						3	7.5	12.5	21.2	159	
	FD240A-0450.040	450	0.4	240	8	4	12	180	1.2	8	8	8.5	64	463
	FD240A-0450.050		0.5						1.5	8	8	10.7	80	
	FD240A-0450.060		0.6						1.8	8	8	12.8	96	
	FD240A-0450.100		1.0						3	8	14	21.2	159	
	FD240A-0630.040	630	0.4	240	8	5	12	253	1.7	10	10	8.5	64	488
	FD240A-0630.050		0.5						2.1	10	9	10.7	80	
	FD240A-0630.060		0.6						2.5	11	11	12.8	96	
	FD240A-0630.100		1.0						4.2	11	18	21.2	159	

FD200B (2:1)

FD200B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE



PRODUCT INTRODUCTION

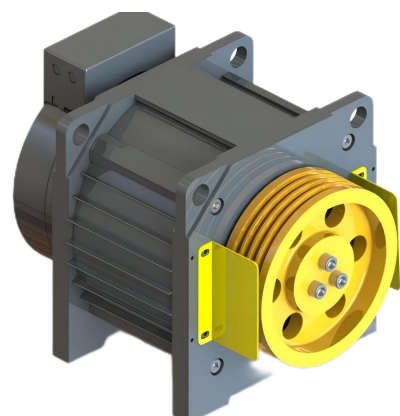

PERFECT FOR WITHIN 6 FLOOR BUILDING

- ★ Load: 320kg—630kg
- ★ Speed: 0.4m/s—1.0m/s
- ★ Suspension: 2:1
- ★ Max. Static Load: 2500kg
- ★ Pole pairs: 8
- ★ IP Code: IP41
- ★ INS. Class: F
- ★ Brake: DC110V/1.23A

PRODUCT SIZE

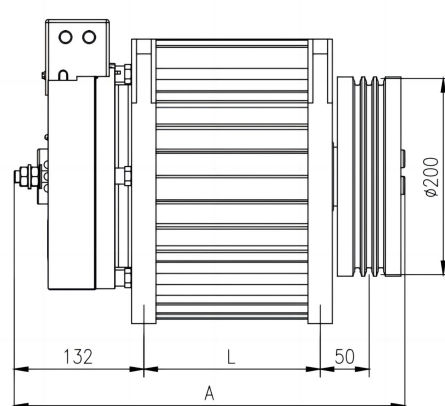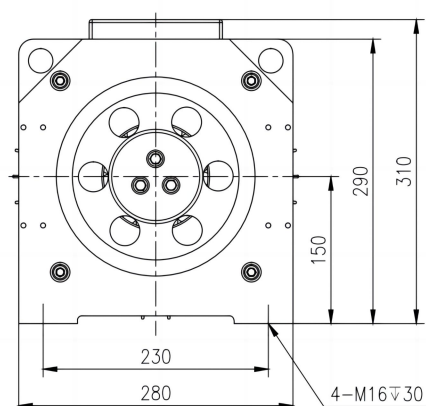


FD200B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳直径 Rope Dia	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 power	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequency	额定转速 Rated Spee	安装尺寸(mm) Installation Size (mm)	
		kg	m/s	mm	mm	pcs	mm	Nm	kW	A	A	Hz	rpm	L	A
FD200B	FD200B-0320.040	320	0.4	200	8	3	12	107	1.2	5.5	5.5	10.1	76	180	399
	FD200B-0320.050		0.5						1.5	6	6	12.8	96		
	FD200B-0320.060		0.6						1.8	6	6	15.3	115		
	FD200B-0320.100		1.0						3	6	10	25.5	191		
	FD200B-0400.040	400	0.4	200	8	3	12	134	1.2	6.5	6.5	10.1	76	180	399
	FD00B-0400.050		0.5						1.5	7	7	12.8	96		
	FD200B-0400.060		0.6						1.8	7.5	7.5	15.3	115		
	FD200B-0400.100		1.0						3	7.5	12.5	25.5	191		
	FD200B-0450.040	450	0.4	200	8	4	12	150	1.2	7.5	7.5	10.1	76	180	399
	FD200B-0450.050		0.5						1.5	8	8	12.8	96		
	FD200B-0450.060		0.6						1.8	8	8	15.3	115		
	FD200B-0450.100		1.0						3	8	14	25.5	191		
	FD200B-0630.040	630	0.4	200	8	5	12	210	1.7	10	10	10.1	76	205	424
	FD200B-0630.050		0.5						2.1	10	10	12.8	96		
	FD200B-0630.060		0.6						2.5	11	11	15.3	115		
	FD200B-0630.100		1.0						4.2	11	18	25.5	191		

FD240B (2 : 1)

FD240B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE



PRODUCT
INTRODUCTION

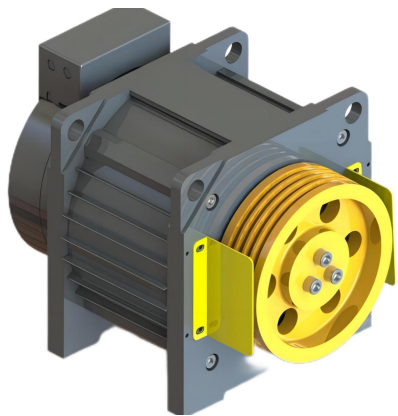

PERFECT FOR
WITHIN 6 FLOOR BUILDING

- ★ Load:320kg—630kg
- ★ Speed:0.4m/s—1.0m/s
- ★ Suspension:2:1
- ★ Max. Static Load:2500kg
- ★ Pole pairs:8
- ★ IP Code:IP41
- ★ INS. Class:F
- ★ Brake:DC110V/1.23A

PRODUCT
SIZE

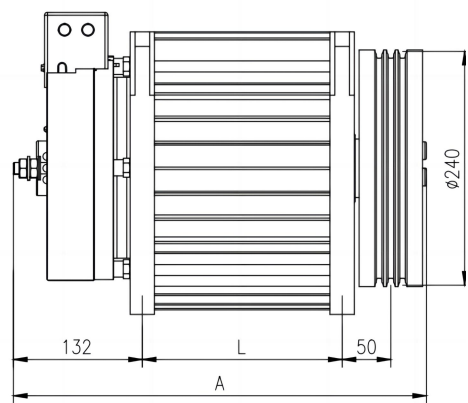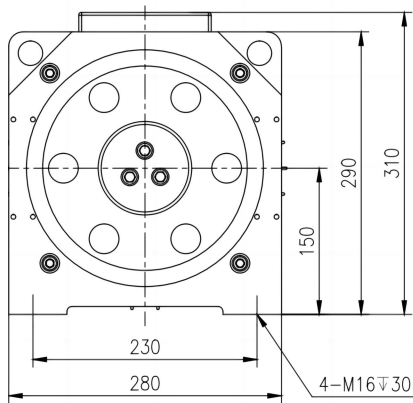


FD240B (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳 直径 Rope Dia.	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 power	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequen	额定转速 Rated speed	安装尺寸 (mm)	
		kg	m/s	mm	mm	pcs	mm	Nm	kw	A	A	Hz	rpm	L	A
FD240B	FD240B-0320.040	320	0.4	240	8	3	12	130	1.2	6	6	8.5	64	205	424
	FD240B-0320.050		0.5						1.5	6	6	10.7	80		
	FD240B-0320.060		0.6						1.8	6	7	12.8	96		
	FD240B-0320.100		1.0						3	6	10	21.2	159		
	FD240B-0400.040	400	0.4	240	8	3	12	160	1.2	7.5	7.5	8.5	64	205	424
	FD240B-0400.050		0.5						1.5	7.5	7.5	10.7	80		
	FD240B-0400.060		0.6						1.8	7.5	7.5	12.8	96		
	FD240B-0400.100		1.0						3	7.5	12.5	21.2	159		
	FD240B-0450.040	450	0.4	240	8	4	12	180	1.2	8	8	8.5	64	205	424
	FD240B-0450.050		0.5						1.5	8	8	10.7	80		
	FD240B-0450.060		0.6						1.8	8	8	12.8	96		
	FD240B-0450.100		1.0						3	8	14	21.2	159		
	FD240B-0630.040	630	0.4	240	8	5	12	253	1.7	10	10	8.5	64	230	449
	FD240B-0630050		0.5						2.1	10	10	10.7	80		
	FD240B-0630.060		0.6						2.5	11	11	12.8	96		
	FD240B-0630.100		1.0						4.2	11	18	21.2	159		

FD320 (2:1)

FD320 (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE


PRODUCT
INTRODUCTION

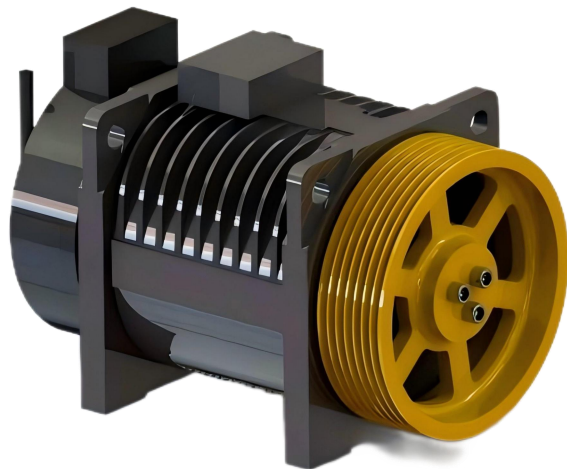

PERFECT FOR
WITHIN 20 FLOOR BUILDING

- ★ Load: 630kg—1000kg
- ★ Speed: 0.63m/s—2.0m/s
- ★ Suspension: 2:1
- ★ Max. Static Load: 5000kg
- ★ Pole pairs: 12
- ★ IP Code: IP41
- ★ INS. Class: F
- ★ Brake: DC110V/1.48A*2

PRODUCT
SIZE

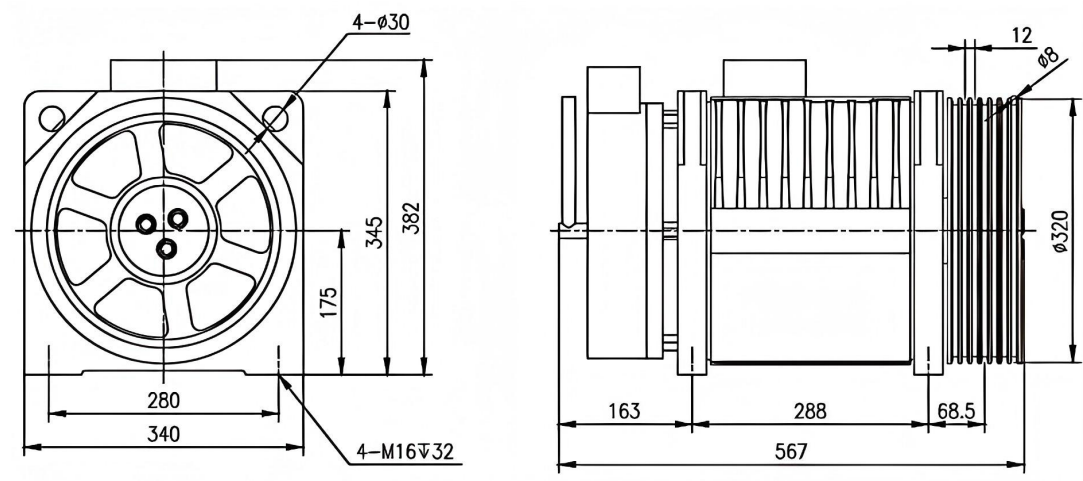


FD320 (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	钢丝绳 直径 Rope Dia.	槽数 Groove	槽间距 Distance Between Grooves	转矩 Toque	功率 power	额定电流 Current 380V	推荐高度 Height	额定频率 Frequen	额定转速 Rated speed		
		kg	m/s	mm	mm	pcs	mm	Nm	kw	A	m	Hz	rpm		
FD320	FD320-0630.063	630	0.63	320	8	4	12	340	2.7	9	≤50	15	75		
	FD320-0630.100		1.0						4.2	10	≤50	23.8	119		
	FD320-0630.150		1.5						6.4	16	≤80	35.8	179		
	FD320-0630.160		1.6						6.8	16	≤80	38.2	191		
	FD320-0630.175		1.75						7.4	18	≤80	41.8	209		
	FD320-0800.063	800	0.63	320	8	6	12	430	3.4	8	≤50	15	75		
	FD320-0800.100		1.0						5.4	12	≤50	23.8	119		
	FD320-0800.150		1.5						8.1	20	≤80	35.8	179		
	FD320-0800.160		1.6						8.6	20	≤80	38.2	191		
	FD320-0800.175		1.75						9.4	21	≤80	41.8	209		
	FD320-0800.200	1000	2.0	320	8	7	12	535	10.7	24	≤100	47.8	239		
	FD320-1000.063		0.63						4.2	13	≤50	15	75		
	FD320-1000.100		1.0						6.7	14	≤80	23.8	119		
	FD320-1000.150		1.5						10.1	24	≤80	35.8	179		
	FD320-1000.160		1.6						10.8	24	≤80	38.2	191		
	FD320-1000.175		1.75						11.8	25	≤80	41.8	209		
	FD320-1000.200		2.0						13.4	33	≤100	47.8	239		
	FD320-1050.063	1050	0.63	320	8	7	12	535	4.2	13	≤50	15	75		
	FD320-1050.100		1.0						6.7	14	≤80	23.8	119		
	FD320-1050.150		1.5						10.1	24	≤80	35.8	179		
	FD320-1050.160		1.6						10.8	24	≤80	38.2	191		
	FD320-1050.175		1.75						11.8	25	≤80	41.8	209		
	FD320-1050.200		2.0						13.4	33	≤100	47.8	239		

FDBT100A (2:1/1:1)


FDBT100A (SUSPENSION 2:1/1:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT
INTRODUCTION

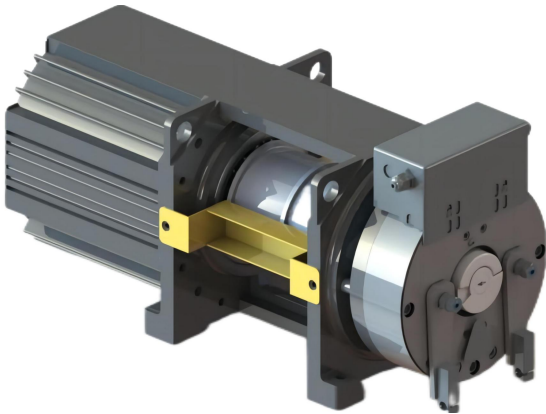

- ★载重 (Load) : 320kg--630kg
- ★梯速 (Speed) : 0.4m/s—1.0m/s
- ★曳引比 (Suspension) : 2:1/1:1
- ★最大轴负载 (Max. Static Load) : 2500kg
- ★极对数 (Pole pairs) : 8
- ★防护等级 (IP Code) : IP41
- ★绝缘等级 (INS. Class) : F
- ★制动器 (Brake) : DC110V/1.53A

SIZE
PRODUCT

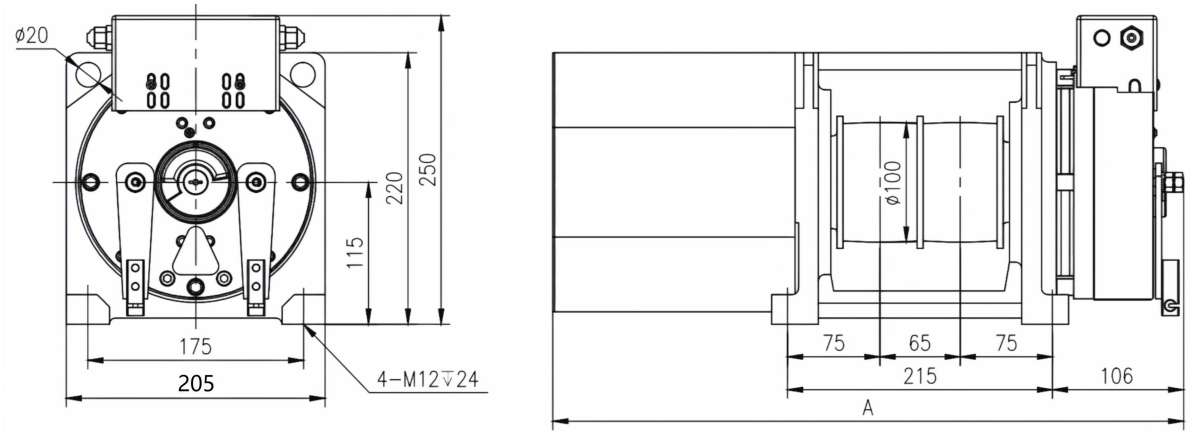

FDBT100A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	绳轮 Number of Belts	转矩 Toque	功率 Power	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequency	额定转速 Rated Speed	尺寸(mm) A
		kg	m/s	mm	No	Nm	kW	A	A	Hz	rpm	A
FDBT100A	FDBT100A-0320.040	320	0.4	100	2X30-65	54	1.2	5.5	5.5	20.4	153	512
	FDBT100A-0320.050		0.5				1.5	6	6	25.5	191	
	FDBT100A-0320.060		0.6				1.8	6.5	6.5	30.7	230	
	FDBT100A-0320.100		1.0				3	6.5	10.5	50.9	382	
	FDBT100A-0400.040	400	0.4	100	2X30-65	67	1.2	6.5	6.5	20.4	153	
	FDBT100A-0400.050		0.5				1.5	7.5	7.5	25.5	191	
	FDBT100A-0400.060		0.6				1.8	7.5	7.5	30.7	230	
	FDBT100A-0400.100		1.0				3	8	13	50.9	382	
	FDBT100A-0450.040	450	0.4	100	2X30-65	75	1.2	7.5	7.5	20.4	153	552
	FDBT100A-0450.050		0.5				1.5	8	8	25.5	191	
	FDBT100A-0450.060		0.6				1.8	8	8	30.7	230	
	FDBT100A-0450.100		1.0				3	8	14.5	50.9	382	
	FDBT100A-0630.040	630	0.4	100	2X30-65	105	1.7	9	9	20.4	153	
	FDBT100A-0630.050		0.5				2.1	9	9	25.5	191	
	FDBT100A-0630.060		0.6				2.5	9.5	9.5	30.7	230	
	FDBT100A-0630.100		1.0				4.2	9.5	19	50.9	382	

FDBT100A (SUSPENSION 1:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

系列型号 Series	产品型号 Model	载重 Load	梯速 Speed	曳引轮直径 Sheave Dia	绳轮 Number of Belts	转矩 Toque	功率 Powe	额定电流 Current 380V	额定电流 Current 220V	额定频率 Frequency	额定转速 Rated Speed	尺寸(mm)
		kg	m/s	mm	No	Nm	kW	A	A	Hz	rpm	A
FDBT100A	FDBT100A-0320.040	320	0.4	100	2X30-65	107	1.2	6.5	6.5	10.1	76	552
	FDBT100A-0400.040	400				134	1.2	7.5	7.5			
	FDBT100A-0320.050	320	0.5	100	2X30-65	107	1.5	6.5	6.5	12.8	96	552
	FDBT100A-0400.050	400				134	1.5	7.5	7.5			
	FDBT100A-0320.060	320	0.6	100	2X30-65	107	1.5	6.5	6.5	15.3	115	552
	FDBT100A-0400.060	400				134	1.5	7.5	8.5			
	FDBT100A-0320.100	320	1.0	100	2X30-65	107	2.7	7.5	9.2	25.5	191	552
	FDBT100A-0400.100	400				134	2.7	7.5	12.5			



导轮
Guide Pulley



钢带
Belt



钢带断丝检测
Belt breaking detect




钢带夹
Belt clip

FDR320A (2:1)



FDR320A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT INTRODUCTION

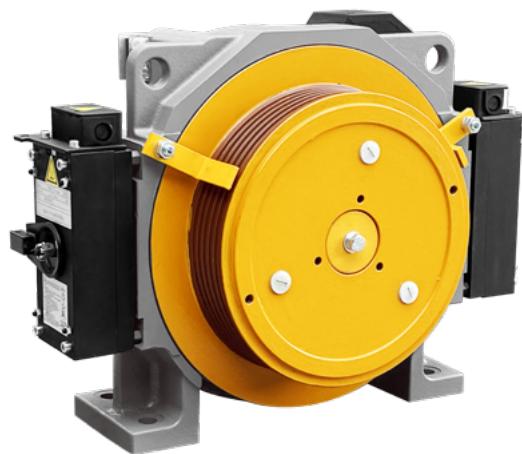

- ★载重 (Load) : 320kg—630kg
- ★梯速 (Speed) : 0.4m/s—1.75m/s
- ★曳引比 (Suspension) : 2:1
- ★最大轴负载 (Max. Static Load) : 2000kg
- ★极对数 (Pole pairs) : 32
- ★防护等级 (IP Code) : IP41
- ★绝缘等级 (INS. Class) : F
- ★制动器 (Brake) : DC110V 2×0.84A (2×1.46A)

SIZE PRODUCT

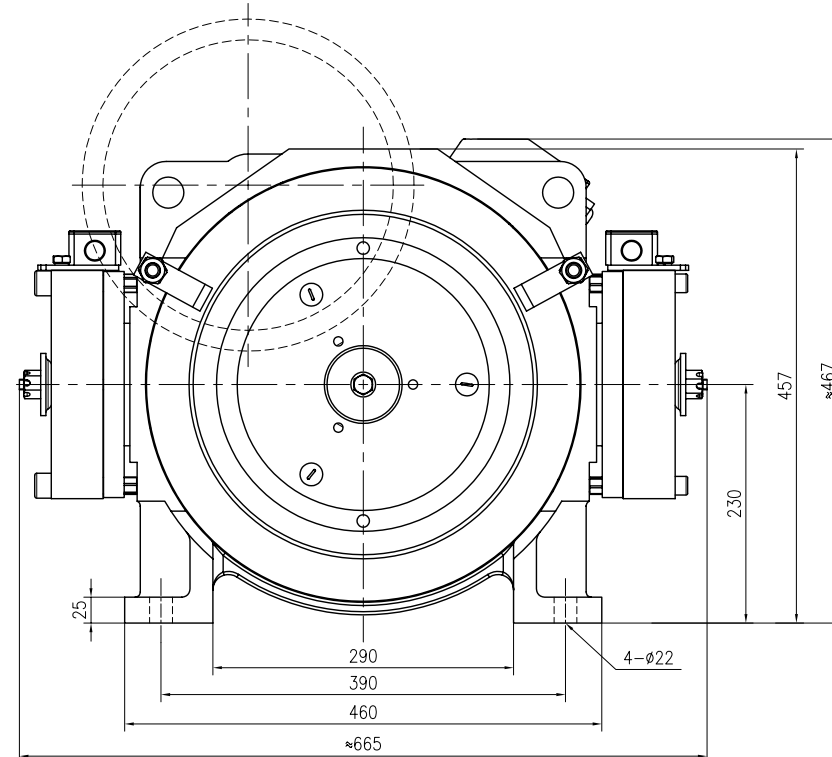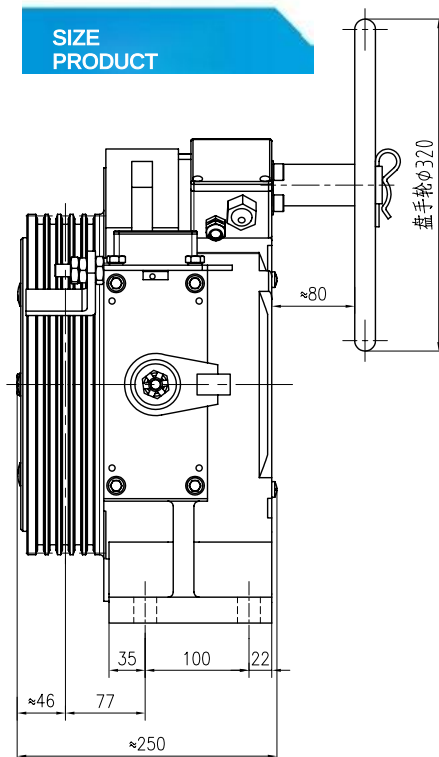


FDR320A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

Spec	Load (kg)	Lift Speed (m/s)	Sheave Dia.(mm)	Rope Groove (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)
FDR320A-320-1.0	320	1.0	Φ325	3xΦ8x12	6.3	200	118	31.5	2.5
FDR320A-320-1.5		1.5			8.9	200	177	47.2	3.7
FDR320A-320-1.6		1.6			9.4	200	189	50.4	4
FDR320A-320-1.75		1.75			9.4	200	206	54.9	4.3
FDR320A-450-1.0	450	1.0	Φ325	4xΦ8x12	8.3	265	118	31.5	3.3
FDR320A-450-1.5		1.5			11.9	265	177	47.2	4.9
FDR320A-450-1.6		1.6			13.7	265	189	50.4	5.2
FDR320A-450-1.75		1.75			13.7	265	206	54.9	5.7
FDR320A-550-1.0	550	1.0	Φ325	5xΦ8x12	8.6	290	118	31.5	3.6
FDR320A-550-1.5		1.5			12.4	290	177	47.2	5.4
FDR320A-550-1.6		1.6			14.3	290	189	50.4	5.7
FDR320A-550-1.75		1.75			14.3	290	206	54.9	6.3
FDR320A-630-1.0	630	1.0	Φ325	5xΦ8x12	9.6	325	118	31.5	4
FDR320A-630-1.5		1.5			13.9	325	177	47.2	6
FDR320A-630-1.6		1.6			16	325	189	50.4	6.4
FDR320A-630-1.75		1.75			16	325	206	54.9	7

FDR400A (2:1)



FDR400A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE

PRODUCT INRODUCTION

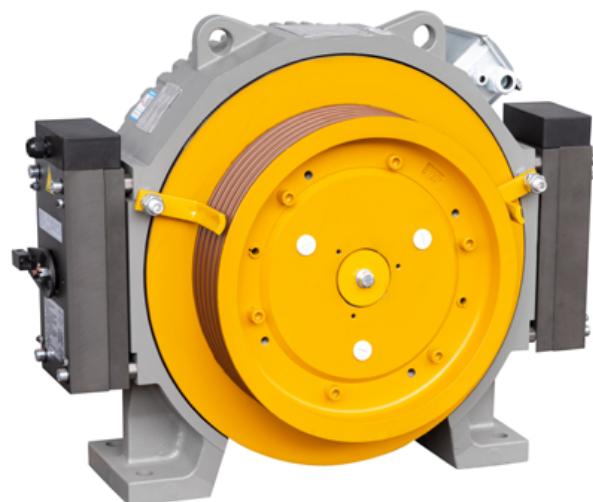

- ★载重 (Load) : 630kg—1150kg
- ★梯速 (Speed) : 1. 0m/s—2. 0m/s
- ★曳引比 (Suspension) : 2:1
- ★最大轴负载 (Max. Static Load) : 3000kg
- ★极对数 (Pole pairs) : 3 2
- ★防护等级 (IP Code) : IP41
- ★绝缘等级 (INS. Class) : F
- ★制动器 (Brake) : DC110V 2x1.28A

SIZE PRODUCT

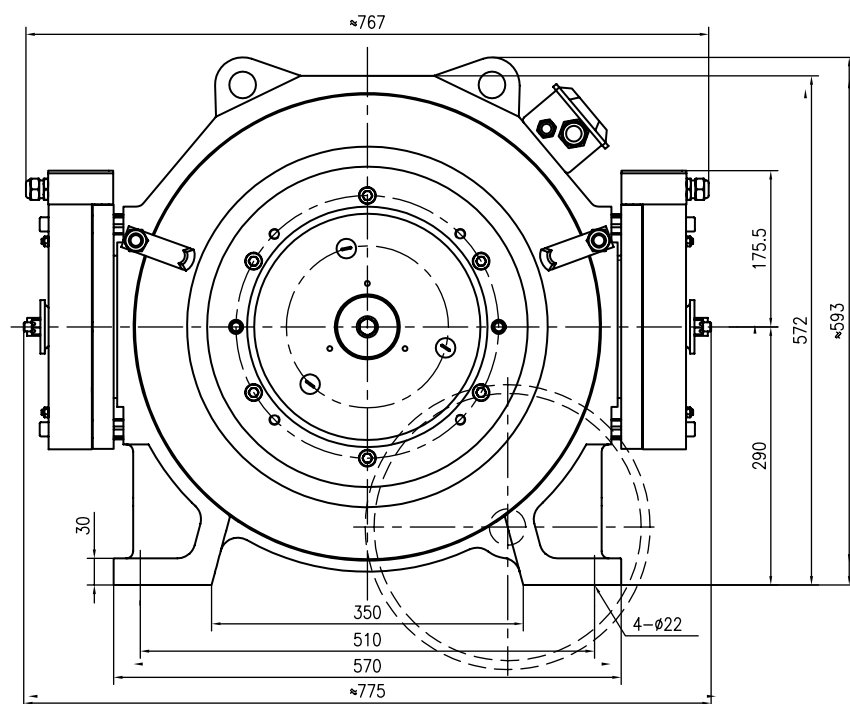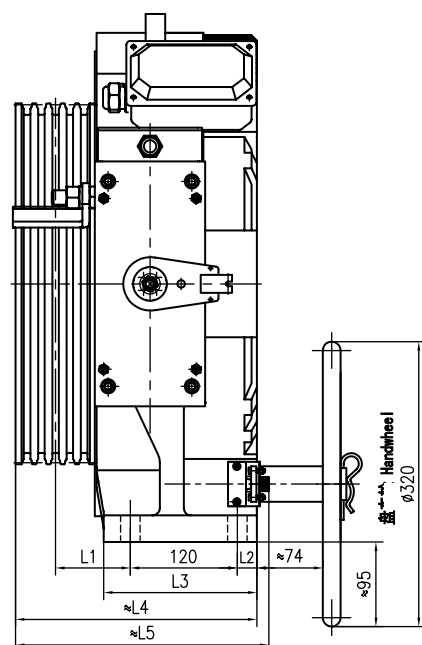

FDR400A (SUSPENSION 2:1) SERIES GEARLESS TRACTION MACHINE SELECT TABLE

Spec	Load (kg)	Lift Speed (m/s)	Sheave Dia.(mm)	RopeGroove (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)	Length L1	Length L2	Length L3	Length L4	Length L5
FDR400A-630-1.0	630	1.0	Φ400	4×Φ10×16	9.7	420	96	25.6	4.2	84	22	172	271	285
FDR400A-630-1.5		1.5			14.9	420	144	38.4	6.3					
FDR400A-630-1.6		1.6			14.9	420	153	40.8	6.7					
FDR400A-630-1.75		1.75			15.9	420	167	44.5	7.3					
FDR400A-630-2.0		2.0			18.3	420	192	51.2	8.4					
FDR400A-800-1.0	800	1.0	Φ400	5×Φ10×16	12.1	530	96	25.6	5.3	84	22	172	271	285
FDR400A-800-1.5		1.5			18.8	530	144	38.4	8					
FDR400A-800-1.6		1.6			18.8	530	153	40.8	8.5					
FDR400A-800-1.75		1.75			20.7	530	167	44.5	9.3					
FDR400A-800-2.0		2.0			23.2	530	192	51.2	10.7					
FDR400A-1000-1.0	1000	1.0	Φ400	5×Φ10×16	14.7	650	96	25.6	6.5	84	22	172	271	285
FDR400A-1000-1.5		1.5			22.9	650	144	38.4	9.8					
FDR400A-1000-1.6		1.6			22.9	650	153	40.8	10.4					
FDR400A-1000-1.75		1.75			25.1	650	167	44.5	11.4					
FDR400A-1000-2.0		2.0			28.2	650	192	51.2	13.1					
FDR400A-1150-1.0	1150	1.0	Φ340	8×Φ8×12	17.2	650	112	29.9	7.6	92	44	192	309	323
FDR400A-1150-1.5		1.5			26.3	650	168	44.8	11.4					
FDR400A-1150-1.6		1.6			26.3	650	180	48	12.3					
FDR400A-1150-1.75		1.75			29	650	198	52.8	13.5					
FDR400A-1150-2.0		2.0			33.1	650	225	60	15.3					